

Ш

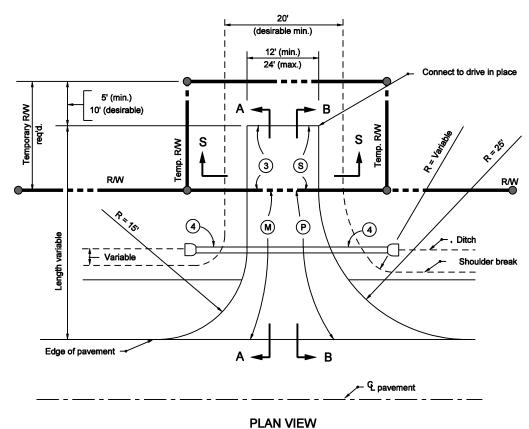

USED FOR RESIDENCES, BARNS, PRIVATE GARAGES, ETC.

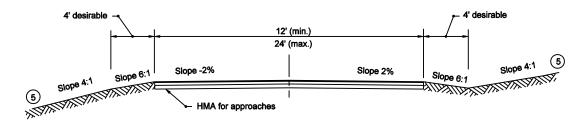

NOTES:

- 1. The driveway detailed on this sheet shall be used under the following conditions:
 - the mainline shoulder is paved and is less than 8 ft in width
 - the mainline shoulder is not paved
- 2. If the driveway surface is unimproved cross section as for driveway Class V can be used in place of Section S-S, see Drawing E 610-DRIV-11 for details.
- 3. See Standard Drawing E 610-DRIV-07 for General Notes.
- 4. See Standard Drawing E 610-DRIV-06 for Sections A-A and B-B.

LEGEND

- M Limits of HMA for approaches
- (P) Limits of compacted aggregate base
- S Equivalent to surface in place

Width variable

165 #/syd HMA Surface Type A on 275 #/syd HMA Intermediate Type A on 8 in. compacted aggregate base #53

HMA FOR APPROACHES


TYPICAL SECTION

SECTION S-S

INDIANA DEPARTMENT OF TRANSPROTATION

CLASS II DRIVE

Ш

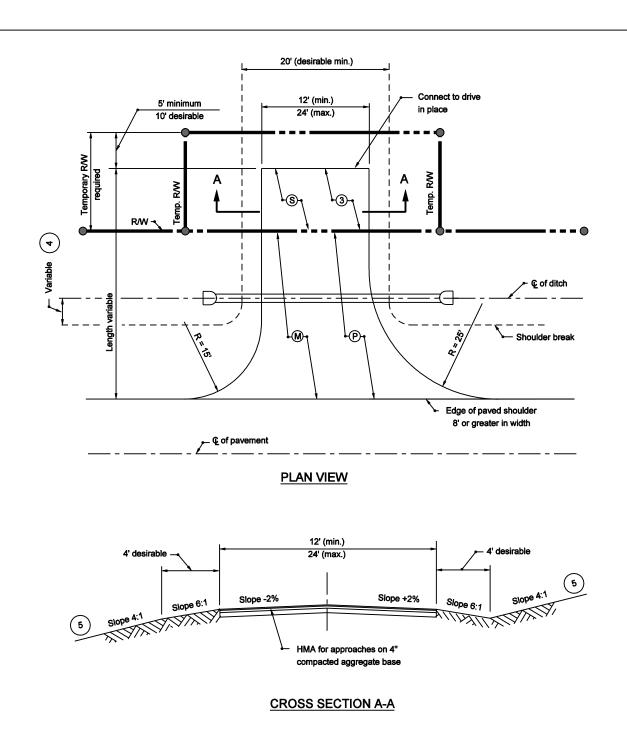

NOTES:

- The driveway detailed on this sheet shall be used when the mainline shoulder is paved and 8' or greater in width.
- See Standard Drawing E 610-DRIV-07 for General Notes.
- See Standard Drawing E 610-DRIV-07 for approach grades with paved shoulder.

LEGEND

- M Limits of HMA for approaches
- P Limits of compacted aggregate base
- S Equivalent to surface in place

Width variable

165 #/syd HMA Surface Type A on 275 #/syd HMA Intermediate Type A on 8 in. compacted aggregate base #53

HMA FOR APPROACHES

TYPICAL SECTION

INDIANA DEPARTMENT OF TRANSPROTATION

CLASS II DRIVE

Shoulder break

Slope 6:1